

# LED

by DESIGN





# Product Index

<b>1. Micro Track Drivers</b>	<b>04 – 11</b>
1. Micro Dim Casambi	06 – 07
2. Micro Casambi Dali Interface	08 – 09
3. Micro Dim Dali	10 – 11
<b>2. Evo Track Drivers</b>	<b>12 – 19</b>
1. Evo Dim Casambi	14 – 15
2. Evo Casambi Dali Interface	16 – 17
3. Evo Casambi 0-10V Interface	18 – 19
<b>3. LED Strip Controller</b>	<b>20 – 43</b>
1. PWM2 Pro	22 – 23
2. PWM2 Pro UL	24 – 25
3. PWM5 Pro	26 – 29
4. PWM5 Pro UL	30 – 33
5. PWM5 Mini	34 – 35
6. PWM2 Pico	36 – 37
7. Casambi Multidim PWM & 0-10V Controller	38 – 41
8. SPI Controller	42 – 43
<b>4. Remote Controller</b>	<b>44 – 47</b>
<b>5. Casambi To DMX</b>	<b>48 – 51</b>
1. DIMX	50 – 51
<b>6. LED E27 Bulbs</b>	<b>52 – 55</b>
1. E27 Smart White	54 – 55
2. E27 RGBTW LED Bulb	54 – 55
3. T38 E27 Smart LED Bulb	54 – 55
<b>7. Smart LED Filament Bulbs</b>	<b>56 – 63</b>
1. Casambi Controlled Filament Bulbs	58 – 61
2. Pendant Sets	62 – 63

# CASAMBI







A.A.G.

STUCCHI

Follow your illumination

# MICRO TRACK DRIVERS




# MICRODIM


## Casambi

# Description

The ultimate DCDC driver, 24-48VDC input With 1 or 2 output channels and constant current mode, this driver is perfect for Tuneable White LEDs. Whether you need a single channel or dual channel mode, the Casambi App puts complete control at your fingertips. Set output mode and current settings from the app to enjoy flicker-free dimming from 0-100%. Designed to work seamlessly with the Stucchi Micro Track adapter, MicroDim Casambi is the go-to solution for confident lighting design.

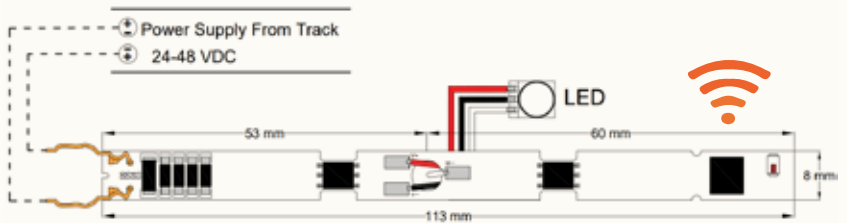

\*All dimensions are in mm

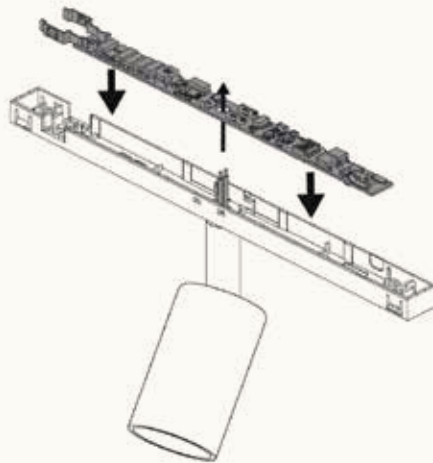

## Technical Information

Input	
Vin	24-48VDC
Output	1 or 2 Channels
Vout	4v - (Vin-6)
Output Current	100-650mA (Set by Casambi App)
Max Power	25w
Wire Type	Wago connectors (20-24AWG wires)
Operating Temp	-20 to +50°C
Polarity	Supports Reverse polarity
Installation	Integrated into Stucchi Micro Track adapter
Dim Control	Casambi App
Weight(g)	12
IP	20
Size(mm)	8 x 5 x 113
Size(in)	0.31 x 0.19 x 4.45
Dim	0-100% (flicker-free)
Certificates	CE, UL Approved
	**LVD(2014/35/EU)




# MICRO Casambi Dali INTERFACE



# Description

Introducing the game-changing Micro Casambi DALI Interface! This powerful device offers unrivaled cluster control of DALI dimmable track fixtures, putting you in complete command of your lighting design. With just one Casambi DALI interface, you can effortlessly control up to 64 DALI devices and create up to 8 groups. Take full control of your track lights with ease through the intuitive Casambi App - dim them, turn them on/off, set scenes, and even automate timers. The installation is a breeze, and setup couldn't be easier. Elevate your architectural designs with confidence using the Micro Casambi DALI Interface - revolutionize lighting control like never before!

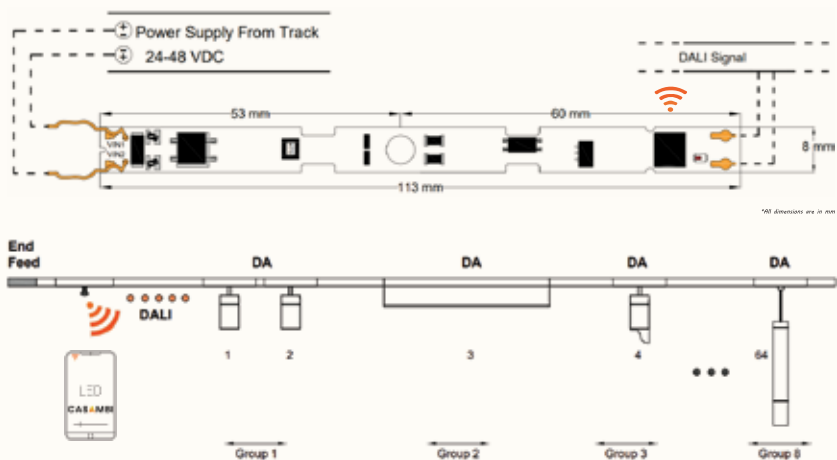


## Available in two options:

1. PCB only [ED01]



2. PCB inside plastic case [ED03]



## Technical Information

Input		Mounting	Inside Stucchi Micro Track adapter
Power	24-48VDC	Weight (g)	30
Output		Control Device	iOS device - iPod/iPhone/iPad Android 4.4 or later device
Output Current	(DALI Current) 180mA	IP	20
Wire Type	20-24 AWG wire connector	Dim Control	0-100% by Casambi App (flicker-free)
Operating Temp	-20 to +80oC	Installation	Integrated into Stucchi Micro Track adapter
Radio Transceiver	2.401 - 2.483 GHz	Certificates	CE, UL Approved
Polarity	Supports inverse polarity		**LVD(2014/35/EU)
Size (mm)	8 x 5 x 113		
Size (in)	0.31 x 0.19 x 4.45		




# MICRODIM

## Dali

# Description

MicroDim DALI is a small DCDC LED driver with 1 channel constant current output. MicroDim DALI works with 24-4 VDC input and should be installed into The Stucchi Micro adapter, works with the Stucchi Micro Low Voltage Track System. Adjustable output current from 100 mA to 650 mA set by a DIP switch. MicroDim DALI is DALI Type 6 (DT6) dimmable. The max output power is 25 W with Dimming range from 0 to 100%, flicker-free.

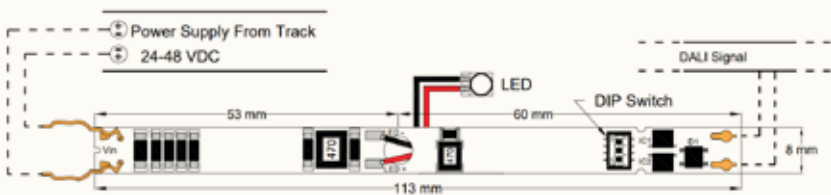

## Technical Information

Input	
Vin	24-48VDC
Output	1 Channels
Vout	4v - (Vin-8)
Output Current	100-650mA (Set by DIP Switch)
Max Power	25w
Wire Type	Wago connectors (20-24AWG wires)
Operating Temp	-20 to +50oC
Polarity	Supports Reverse polarity
Installation	Integrated into Stucchi Micro Track adapter
Dim Control	DALI DT6
Weight(g)	12
IP	20
Size(mm)	8 x 5 x 113
Size(in)	0.31 x 0.19 x 4.45
Dim	0-100% (flicker-free)
Certificates	CE, UL Approved
	**LVD(2014/35/EU)



CASAMBI







A.A.G.

STUCCHI

Follow your illumination

# EVO TRACK DRIVERS




# EVODIM

## Casambi

# Description

The ultimate DCDC driver, 24-48VDC input With 1 or 2 output channels and constant current mode, this driver is perfect for Tuneable white LEDs. Whether you need a single channel or dual channel mode, the Casambi App puts complete control at your fingertips. Set output mode and current settings from the app to enjoy flicker-free dimming from 0-100%. Designed to work seamlessly with the Stucchi EVO Track adapter, EVODim Casambi is the go-to solution for confident lighting design.

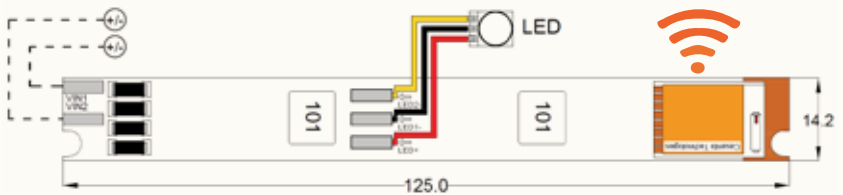

\*All dimensions are in mm



EVODim Casambi case.

## Technical Information

Input		Dim Control	Casambi App
Vin	24-48VDC	Weight (g)	30
Output	1 or 2 Channels	IP	20
Vout	4v - (Vin-6)	Size (mm)	125 x 14.2 x 10
Output Current	100-700mA (Set by Casambi App)	Size (in)	4.92 x 0.56 x 0.39
Max Power	25W	Dim	0-100% (flicker-free)
Wire Type	Wago Connectors (20-24AWG wires)	Certificates	CE, UL Approved
Operating Temp	-20 to +50oC		**LVD(2014/35/EU)
Polarity	Supports Revers polarity		
Installation	Integrated into Stucchi EVO Track adapter		






# EVO

## Casambi Dali

# INTERFACE

# Description

Introducing the game-changing EVO Casambi DALI Interface! This powerful device offers unrivaled cluster control of DALI dimmable track fixtures, putting you in complete command of your lighting design. With just one Casambi DALI interface, you can effortlessly control up to 64 DALI devices and create up to 8 groups. Take full control of your track lights with ease through the intuitive Casambi App - dim them, turn them on/off, set scenes, and even automate timers. The installation is a breeze, and setup couldn't be easier. Elevate your architectural designs with confidence using the EVO Casambi DALI Interface - revolutionize lighting control like never before!

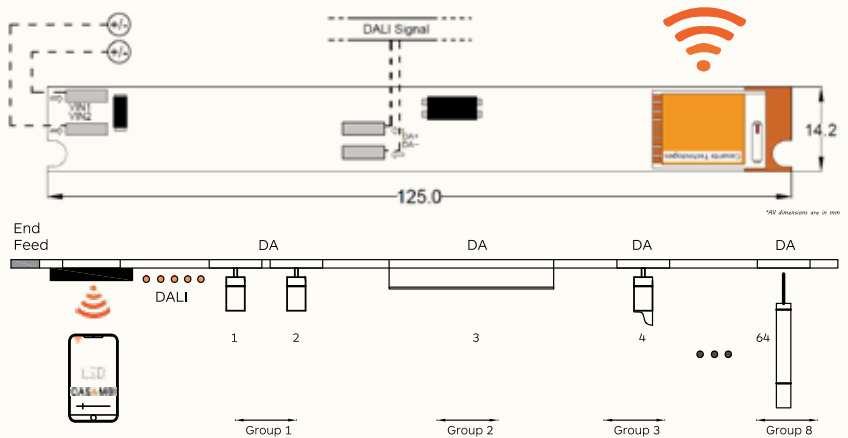

## Available in two options:

1. PCB only [ED01]



2. PCB inside plastic case [ED03]



## Technical Information

Input		Mounting	Inside Stucchi EVO Track adapter
Power	24-48VDC	Weight (g)	30
Output		Control Device	iOS device - iPod/iPhone/iPad Android 4.4 or later device
Output Current	(DALI Current) 180mA	IP	20
Wire Type	20-24 AWG wire connector	Dim Control	0-100% by Casambi App (flicker-free)
Operating Temp	-20 to +80oC	Installation	Integrated into Stucchi EVO Track adapter
Radio Transceiver	2.401 - 2.483 GHz	Certificates	CE, UL Approved
Polarity	Supports inverse polarity		**LVD(2014/35/EU)
Size (mm)	125 x 14.2 x 10		
Size (in)	4.92 x 0.56 x 0.39		





# EVO

Casambi 0-10V

# INTERFACE

# Description

Introducing the game-changing EVO Casambi 0-10V Interface! This powerful device offers unrivaled cluster control of 0-10V dimmable track fixtures, putting you in complete command of your lighting design. With just one Casambi 0-10V interface, you can effortlessly control up to 20 devices. Take full control of your track lights with ease through the intuitive Casambi App - dim them, turn them on/off, set scenes, and even automate timers. The installation is a breeze, and setup couldn't be easier. Elevate your architectural designs with confidence using the EVO Casambi 0-10V Interface revolutionize lighting control like never before!

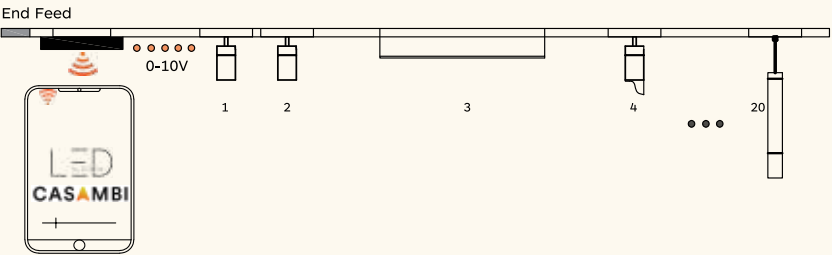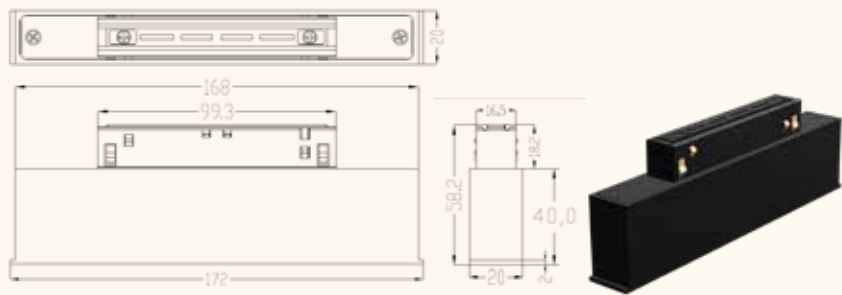

## Technical Information

Input		Mounting	Inside Stucchi EVO Track adapter
Power	24-48VDC	Weight (g)	30
Output	0-10 dim Signal	Control Device	IOS device - iPod/iPhone/iPad Android 4.4 or later device
Output Current	(0-10 Current) 25mA	IP	20
Wire Type	20-24 AWG wire connector	Dim Control	0-100% by Casambi App (flicker-free)
Operating Temp	-20 to +80oC	Installation	Integrated into Stucchi EVO Track adapter
Radio Transceiver	2.401 - 2.483 GHz	Ceritificates	CE
Polarity	Polarized		**LVD(2014/35/EU)
Size (mm)	172 x 20 x 58.2		
Size (in)	6.77 x 0.79 x 2.29		




CASAMBI







# LED STRIP CONTROLLER

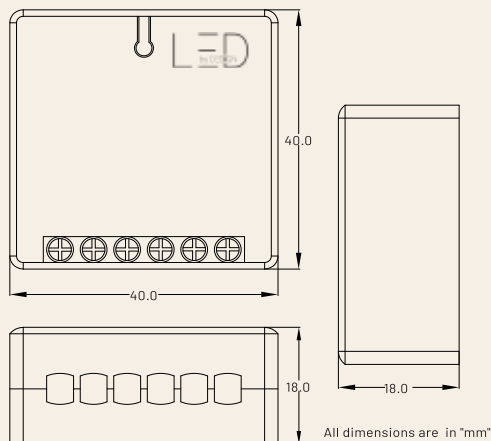

# PWM2 PRO


## Description

PWM2 Pro is a 2-channel PWM dimmer that can be controlled via Bluetooth and is enabled with Casambi technology. It is designed specifically for constant-voltage LED loads, such as LED strips and modules. It is installed between a 12-24VDC power supply and the LED load. The maximum current output is 5A and can be freely divided between the two channels. PWM2 Pro comes with overload protection and guarantees flicker-free performance.


## Technical Information

Input Voltage	12-24V DC
Max. input current	5A
Max. output current	5A
Output Voltage	Same as input
Max Output Power	60w @12VDC / 120w @24VDC
Wire type	14-22AWG
Device Control	PWM by Casambi App
Case size	40 x 40 x 18 mm
Weight	19g
Operating temp	-20 to 50°C
Protection	IP20
Control options	Available profiles
1 channels	Dim
2 channels	Dim, Dim
2 channels	Dim, CCT (Tuneable White)
Certificates	CE, FCC, LVD(2014/35/EU)**

## 27962

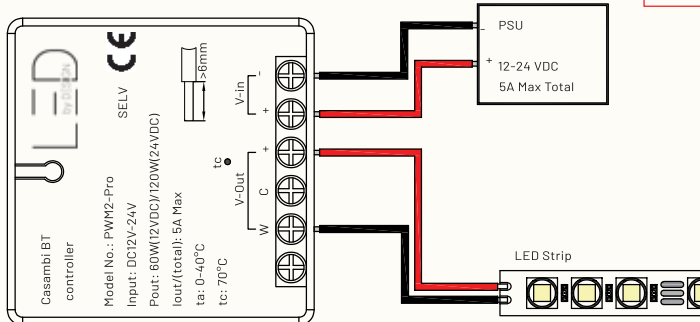


## 27963

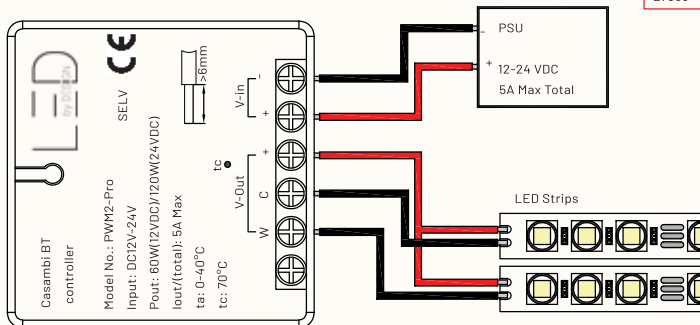


26957=TW

31924=Full Power

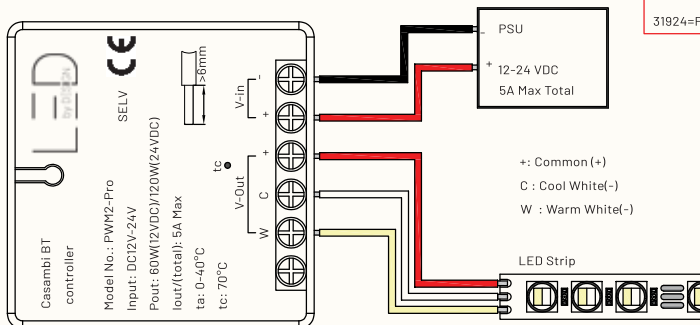

**NOTES:** \*\*Low Voltage Directive (2014/35/EU): The products applicative voltage is under 75VDC of LVD minimum adopted voltage.

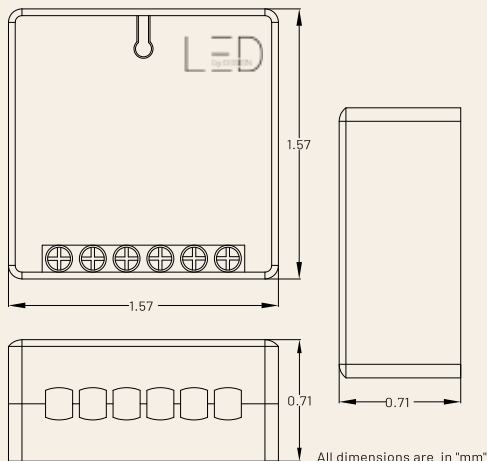

# PWM2 PRO UL

## Description

PWM2 Pro is a 2-channel PWM dimmer that can be controlled via Bluetooth and is enabled with Casambi technology. It is designed specifically for constant-voltage LED loads, such as LED strips and modules. It is installed between a 12-24V DC power supply and the LED load. The maximum current output can be freely divided between the two channels. PWM2 Pro comes with overload protection and guarantees flicker-free performance.


### Technical Information

Input Voltage	12-24V DC
Max. input current	12V DC - 5A, 24V DC - 4.16A
Max. output current	Same as input
Output Voltage	Same as input
Max Output Power	60W @12V DC / 100W @24V DC
Wire type	14-22AWG
Device Control	PWM by Casambi App
Case size	1.57 x 1.57 x 0.71 Inches
Weight	19g
Operating temp	-20 to 50°C (-4 to 122°F)
Protection	IP20
Case Temperature	Max. 70°C (158°F)
Control options	Available profiles
1 channels	Dim
2 channels	Dim, Dim
2 channels	Dim, CCT (Tuneable White)
Certificates	UL listed, FCC

# Multiple Channel Option Diagrams:


## 1xSingle Colour LED Strip

27962

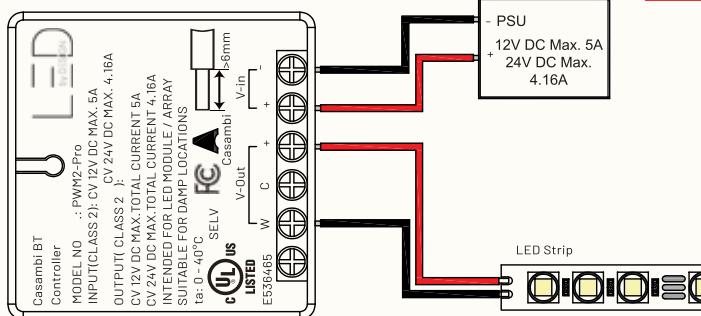

## 2xSingle Colour LED Strip


27963

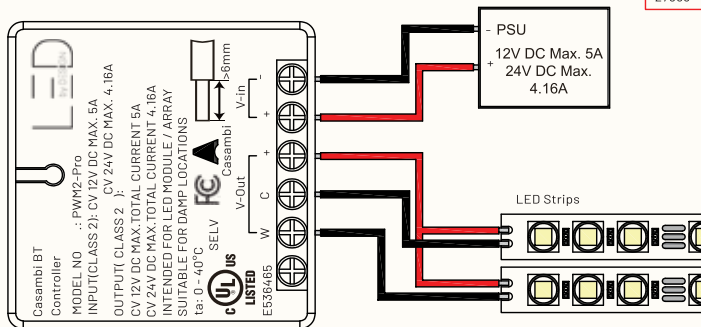

## 1xTuneable White LED Strip

26957=TW

31924=Full Power

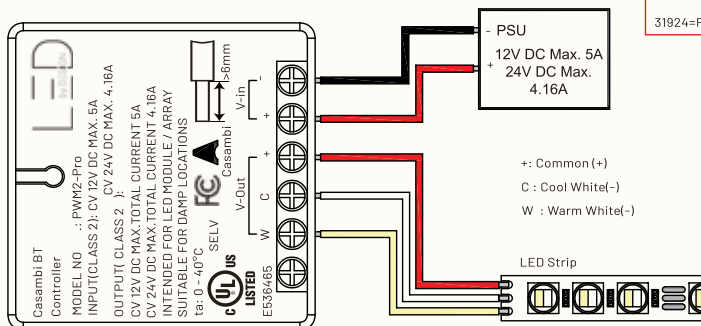



# PWM5 PRO


## Description

PWM5 Pro is a 5-channel PWM dimmer designed for controlling constant-voltage LED loads, such as LED strips and modules. It is equipped with Bluetooth connectivity and Casambi-enabled features that allow for easy and convenient control of LED lighting fixtures. The dimmer is installed between a 12-24 VDC power supply and the constant-voltage LED load. Each channel of the PWM5 Pro is capable of delivering a maximum output current of 4A, and the combined total output current of all channels is 10A max. Additionally, the device is protected against overload and provides flicker-free lighting experience.

### Technical Information


Input Voltage	12-24V DC
Max. input current	10A
Max. output current	10A (4A/ch)
Output Voltage	Same as input
Max Output Power	120W @12VDC / 240W @24VDC
Wire type	14-22AWG
Device Control	PWM by Casambi App
Case size	100 x 47 x h 23 mm
Weight	51g
Operating temp	-20 to 50°C
Protection	IP20
Control options	Available profiles
1-5 channels	1-5 channels independent-channel
2 channels	CCT Tunable white
3 channels	RGB
4 channels	RGBW
4 channels	RGB + White
5 channels	RGBTW / RGBWA
5 channels	RGB + TW
Certificates	CE, FCC, LVD(2014/35/EU)**

# Multiple Channel Option Diagrams:

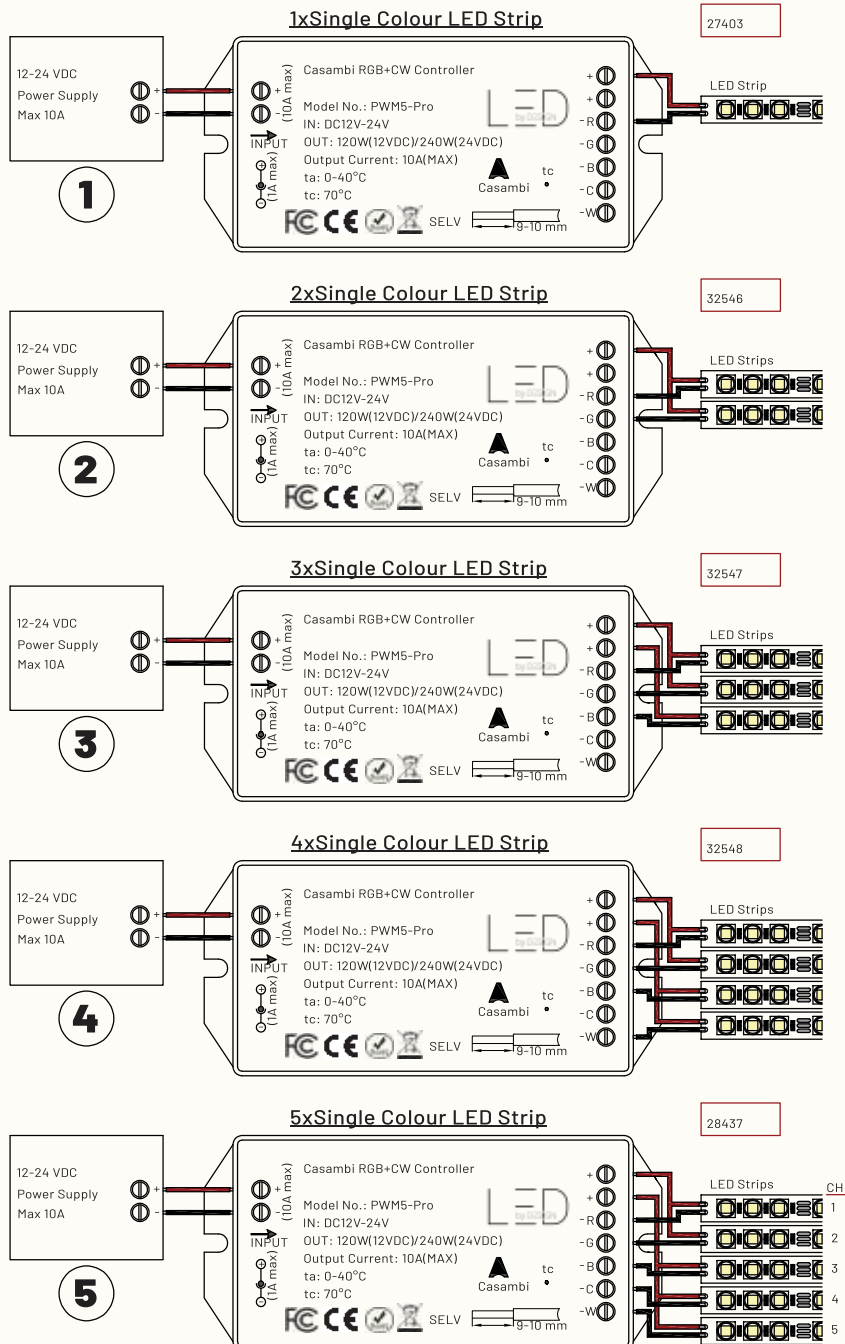


NOTES: \*\*Low Voltage Directive (2014/35/EU): The products applicative voltage is under 75VDC of LVD minimum adopted voltage.


### 1xTuneable White LED Strip

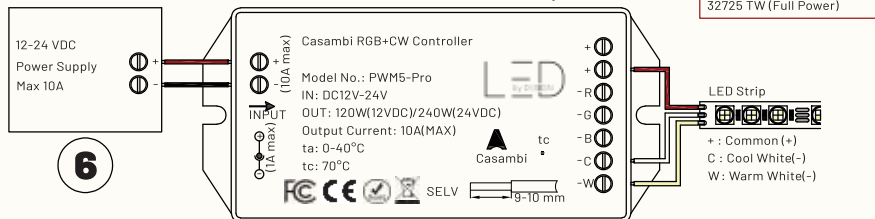


### 2xTuneable White LED Strip

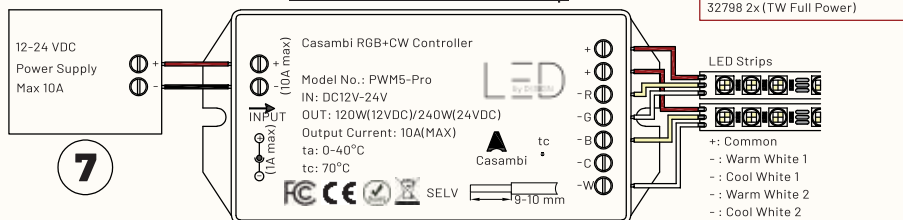


### 1xRGB LED Strip

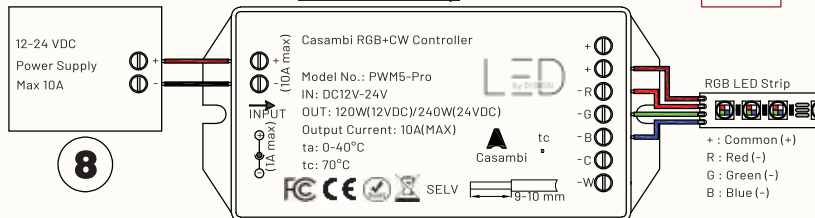

### 1xRGBW LED Strip

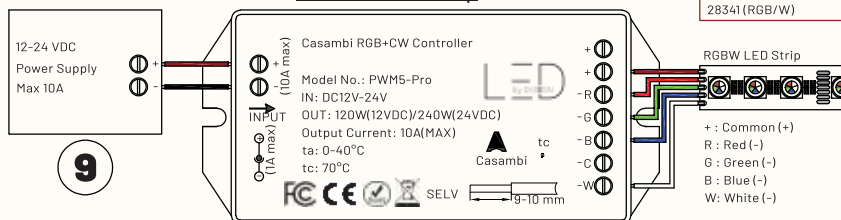


### 1xRGBCW LED Strip

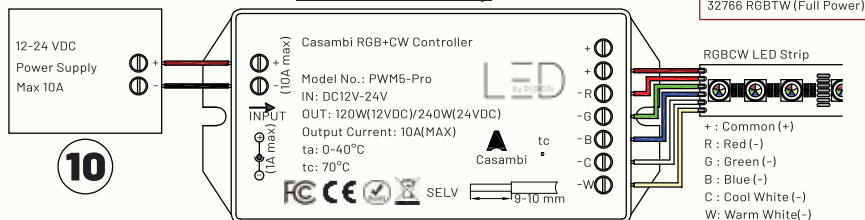



CASAMBI



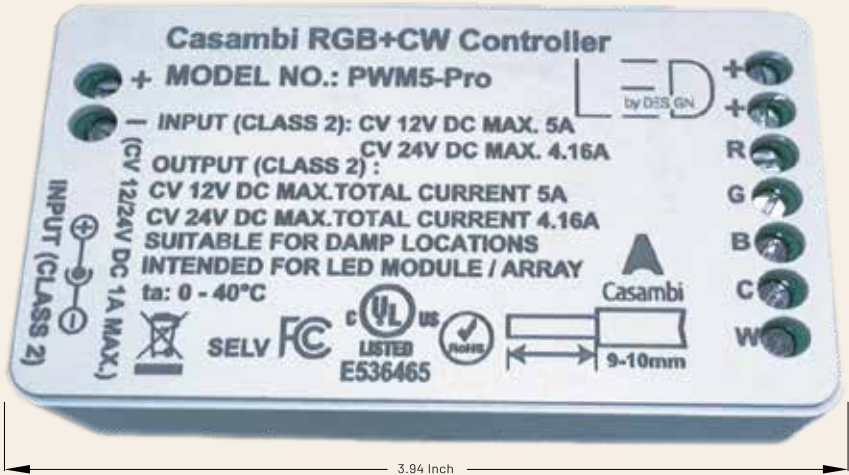

# PWM5 PRO UL






## Description

PWM5 Pro is a 5-channel PWM dimmer designed for controlling constant-voltage LED loads, such as LED strips and modules. It is equipped with Bluetooth connectivity and Casambi-enabled features that allow for easy and convenient control of LED lighting fixtures. The dimmer is installed between a 12-24V DC power supply and the constant-voltage LED load. The Max. Output current can be splitted between the channels or used by a single channel. Additionally, the device is protected against overload and provides flicker-free lighting experience.


## Technical Information

Input Voltage Max.	12-24V DC
input current Max.	12V DC - 5A, 24V DC - 4.16A
output current	Same as input
Output Voltage	Same as input
Wire type	14-22AWG
Device Control	PWM by Casambi App
Case size	3.94 x 1.85 x 0.89 Inches
Weight	51g
Protection	IP20
Operating temp	-20 to 50°C (-4 to 122°F)
Case Temperature	Max. 70°C (158°F)
Control options	Available profiles
1-5 channels	1-5 channels independent-channel
2 channels	CCT Tunable white
3 channels	RGB
4 channels	RGBW
4 channels	RGB + White
5 channels	RGBTW / RGBWA
5 channels	RGB + TW
Ceritificates	UL listed, FCC


# Multiple Channel Option Diagrams:

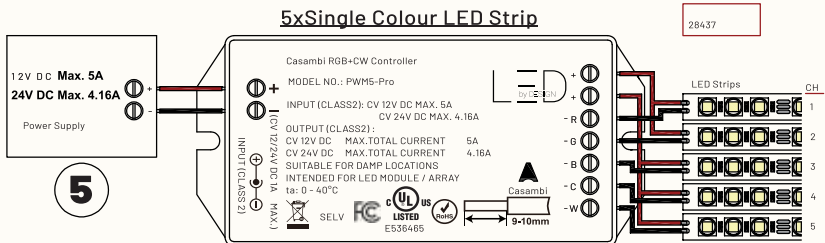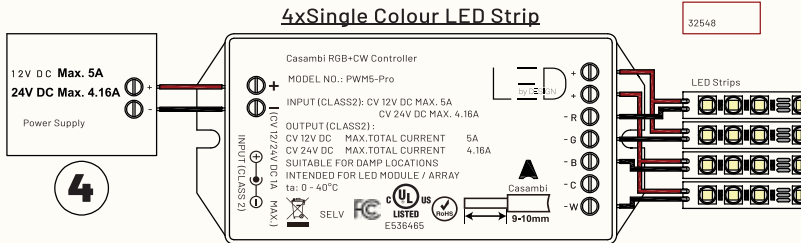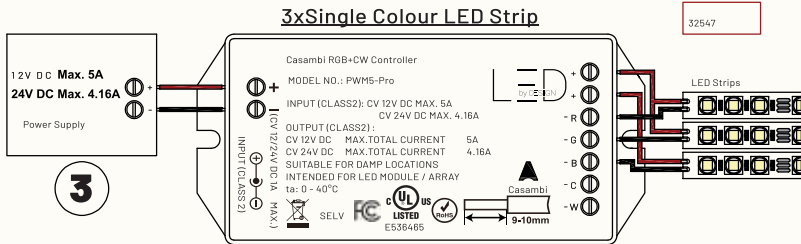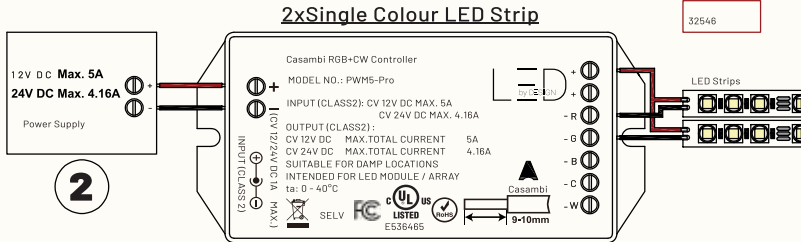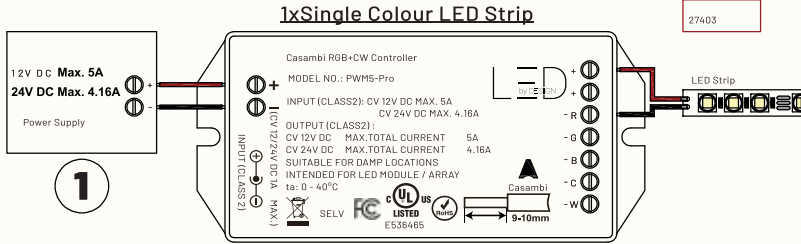


### 1xTuneable White LED Strip

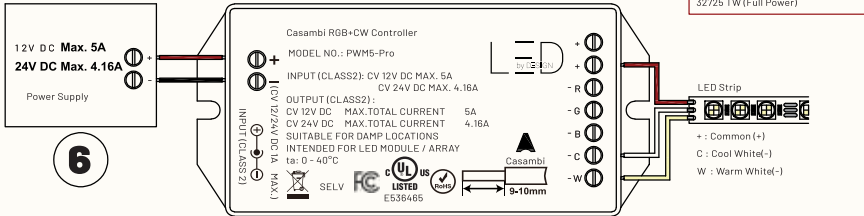


### 2xTuneable White LED Strip

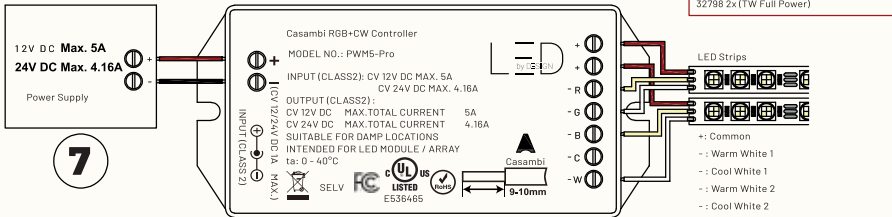


### 1xRGB LED Strip

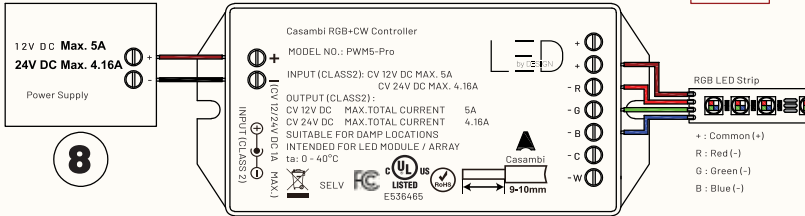


### 1xRGBW LED Strip

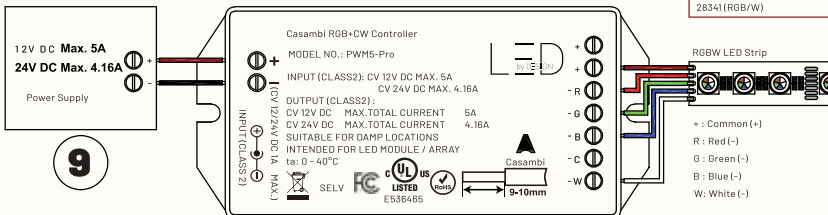

### 1xRGBCW LED Strip

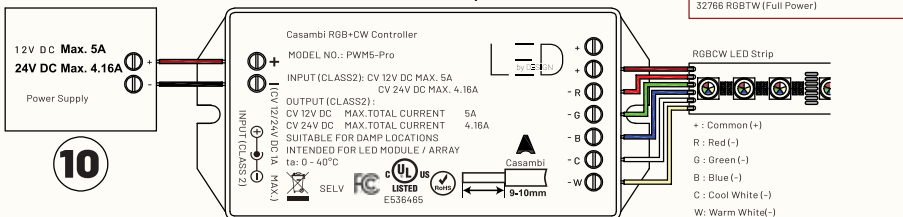



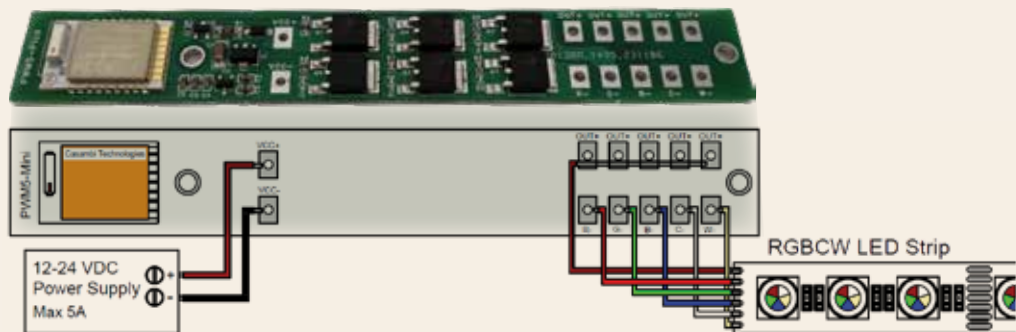

# PWM5 MINI


## Description

PWM5 Mini, a linear shaped 5-channel PWM dimmer is designed for controlling constant-voltage LED loads, such as LED strips and modules. It is equipped with Bluetooth connectivity and Casambi-enabled features that allow for easy and convenient control of LED lighting fixtures. The dimmer is installed between a 12-24 VDC power supply and the constant-voltage LED load. Each channel of the PWM5 Mini is capable of delivering a maximum output current of 3A, and the combined total output current of all channels is 5A max. The device is protected against overload and provides flicker-free lighting experience. Additionally it allows easy installation, thanks to its compact linear design.

### Technical Information

Input Voltage	12-24V DC
Output voltage	Same as input, Constant Voltage
Max. Output Current	5A
Max. current/channel	3A
Wire Type	14-22AWG
Size	120 x 17 x 4,4 mm
Weight	15g
Control Device	PWM by Casambi App
Protection	IP20
Operating Temp	-20 to 40°C
Installation	Remote or integrated
Control options	Available profile
Accessories	(Not included) Gesture control sensor
Certificates	CE, FCC LVD(2014/35/EU)**



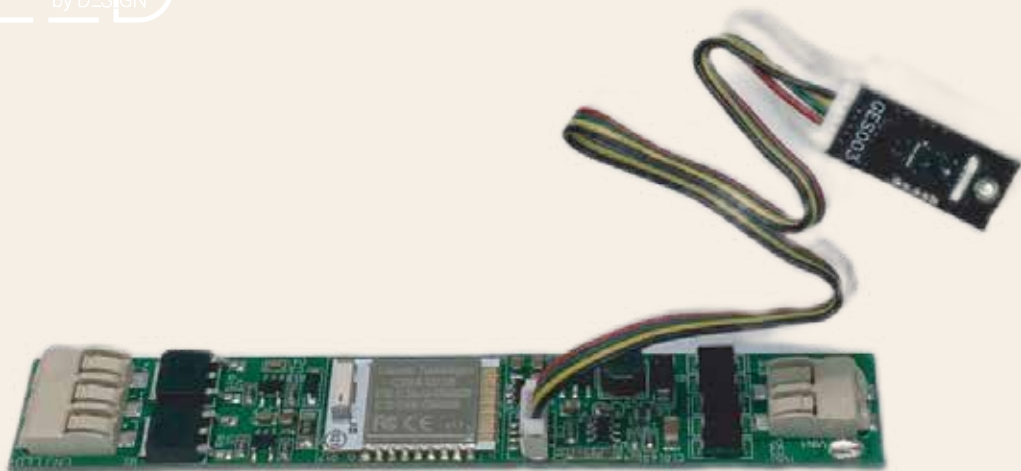

# PWM2-PICO

## Description

PWM@-Pico is 2 channels dimmer for Tuneable White or WarmDim or 2 dimming channels constant voltage LED load like LED strip. PWM2-Pico supports up to 5A, fully controlled by Casambi App. PWM2-Pico can also be controlled by a gesture control sensor for Dim and On/Off control. Thanks to its small size and linear shape it can be integrated into light fixtures.


### Technical Information

Input Voltage	12-24VDCPWM
Output voltage	2 Channels, same as input
Max Output Power	5A, 120W @24V, 60W @12V
Wire Type	18-24AWG
Size (mm)	15 x 100 x 5.5 mm
Weight	15g
Control Device	PWM by Casambi App
Operating Temp	-20...+45°C
Installation	Remote or integrated
Control options	Available profiles
Accessories	(Not included) Gesture control sensor
Certificates	CE, FCC LVD(2014/35/EU)**

NOTES: \*\*Low Voltage Directive (2014/35/EU): The products applicative voltage is under 75VDC of LVD minimum adopted voltage.



# PWM2-Pico

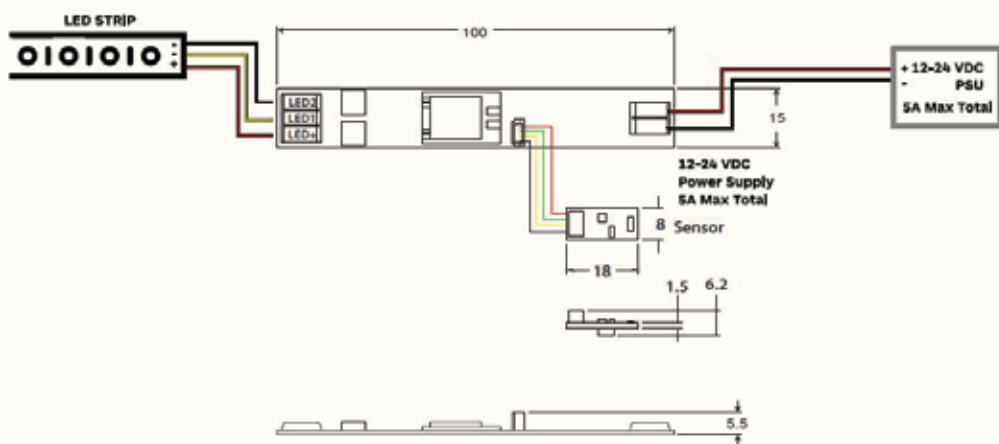

All Dimensions are in "mm"



# CASAMBI MULTIDIM-PWM & 0-10V CONTROLLER

## Description

Unlock limitless control possibilities with the versatile Casambi MultiDim! This wireless control unit boasts two PWM dimmers for your 12-48VDC LED strips, along with two 0-10V dimming outputs for seamless tunable white applications. Say goodbye to excessive stock and hello to streamlined efficiency, as this device empowers you with numerous control options and the ability to combine between PWM and 0-10V control. Experience total confidence in transforming your lighting setup like never before!

### Technical Information

Input Voltage Max.	12-48VDC
input current Max.	6A (4A@48VDC)
output current	6A (4A@48VDC)
Output Voltage Max	Same as input (in PWM)
Output Power	72W@12VDC / 144W@24VDC / 192W@48VDC
Wire type	14-22AWG
Device Control	2 channels PWM & 2 channels 0-10V (Casambi App)
Case size	100 x 47 x 23 mm
Weight	51g
Operating temp	-20 to 50°C
Protection	IP20
Control options	Available profiles
1 Channel PWM	PWM, Single CCT
2 Channels PWM	PWM,PWM, No Mix
2 Channels PWM TW	PWM & PWM Mix TW
2 Channels PWM TW (Full Power)	PWM & PWM Mix TW (Full Power)
1 Channel 0-10V	0-10V, Single CCT
2 Channels 0-10V	0-10V,0-10V, No Mix
2 Channels 0-10V TW	0-10V & 0-10V Mix TW
4 channels 2xPWM, 2x0-10V	PWM,PWM,0-10V,0-10V
Certificates	CE, FCC, LVD(2014/35/EU)**

# CASAMBI

FC CE IP20



# Working Principle Using Casambi App:



Control 2 set of Tunable white(TW)  
Example: direct and indirect light




Control 4 Individual Channels  
2 of PWM and 2 of 0-10V




Control Low Voltage Tracks  
using 0-10V with on/off

## Control Low Voltage Tracks using 0-10V with on/off

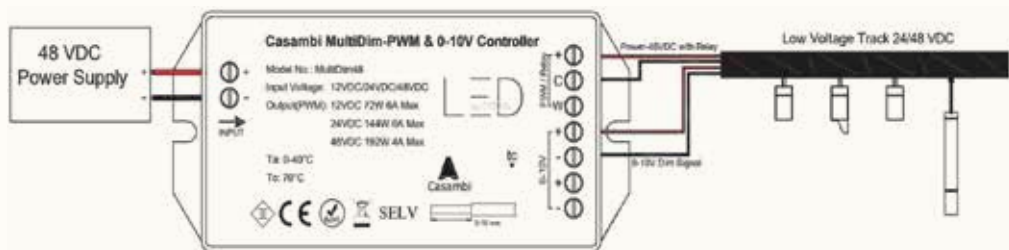



## Control Downlights using 0-10V

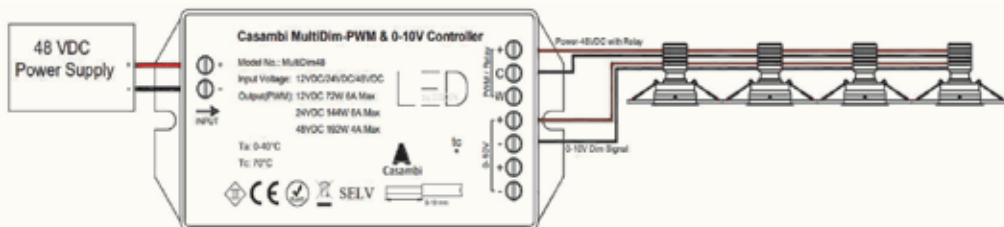

## Control 12-48VDC LED strip



## Control 0-10V dimmable drivers

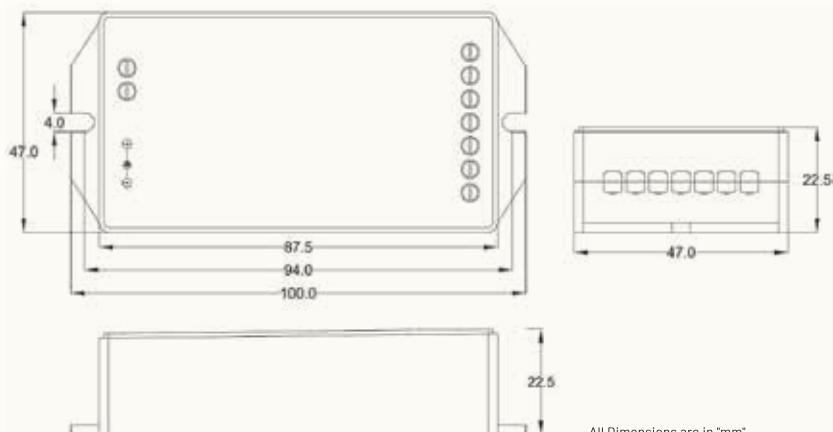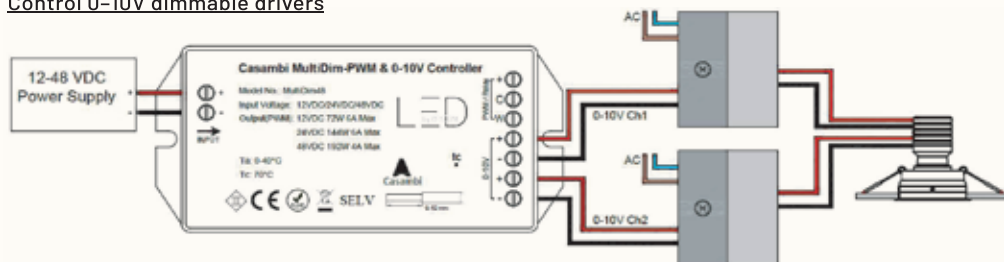

All Dimensions are in "mm"

CASAMBI





# SPI

## CONTROLLER

## Description

Casambi to SPI controller by LED BY DESIGN is a user friendly and easy to use device. This controller can work with SPI Pixel control protocols and supports most of the common IC's used in the industry. This device can control up to 512 pixels (IC's) RGB and RGBW. The Casambi app providing a simplify and easy control of the LED strips, animation, scenes timers and more. User can select a preset program from 255 options, set the chase speed and dim levels, The app also enables use the SPI controlled LED source to work in static mode.

Casambi SPI can support the following IC's:


UCS 1903, UCS 1904 , USC 2903 UCS 2904 UCB 1909,  
UCS 1912 UCS 2909 UCS 2912 , WS2811 WS2812 SM16703

## Technical Information

Input Voltage	12-24V DC
Max. input current	10A
Output current	Max. 20mA
Output Voltage	5V
Max Output Power	120W @12VDC / 240W @24VDC
Wire type	14-22AWG
Device Control	PWM by Casambi App
Case size	100 x 47 x 23 mm
Weight	51g
Operating temp	-20 to 50°C
Protection	IP20
Total Supported Modes	255Modes
Control options	Available profiles
CHIP range	RGB,RGBW
Channel order	Any
Certificates	CE, FCC, LVD(2014/35/EU)**



# Screenshots of the UI/Settings page

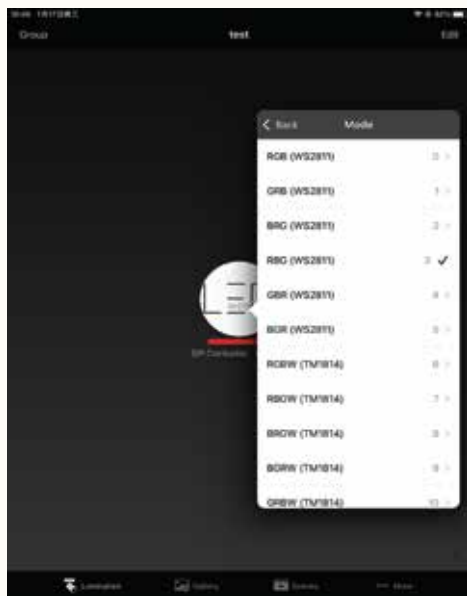

Support both RGB & RGBW LED strips



255 Pre Set model available

# CASAMBI







# Remote CONTROLLER



# REMOTE CONTROLLER

## Description

The Casambi handheld remote controller is compatible with a variety of Casambi LED controllers and drivers.

The remote has a group/scene capability; the lights may be organized into four groups, and four scenes can be saved and recalled. Aside from the ON/OFF and dimming functions, the user can also adjust the brightness to 100% using the keypad. An optional magnet wall holder is available for installation; with ultra-low power consumption, one CR2032 cell battery can support several years of use.

### Technical Information

Working Voltage	DC 3V, CR2032 battery
Wireless Protocol	Casambi smart lighting protocol
Frequency band	2.4GHz ISM band
Wireless power	< 8dBm
Wireless Distance	>20 meters at open area
Standby Power Consumption	<1uA current
Working temperature	-20 to 50°C (-4 to 122°F)
Operation Mode	On/off, dimming and color temperature control, scene control
Group/Scene function	Yes, defined from app
User Interaction	Hidden indicator on top
Installation	Magnet wall holder
Dimension	36x134x9.1mm
Net Weight	Remote controller: 33g, Wall holder: 21g

# Operation

## Turn on / switch to 100%

Press to turn on the light from off status. When light is at "ON" status, press this key to switch to 100% brightness.

## Dim up and dim down

Press "+" and "-" key to dim up and dim down light with step of around 10%. Hold press for smooth dimming.

## Adjust color temperature



Press "<" and ">" key to adjust color temperature of tunable white lights. Hold press for smooth changing.

## Preset buttons


The function of 1-4 keys need to be defined on Casambi app before using. These keys can be configured as individual lamp control, group control, recall scenes or animations.

## Activate for app detection


The remote controller is not visible on Casambi app until it's activated. Please press and key together, or "3" and "4" key together to activate the remote.

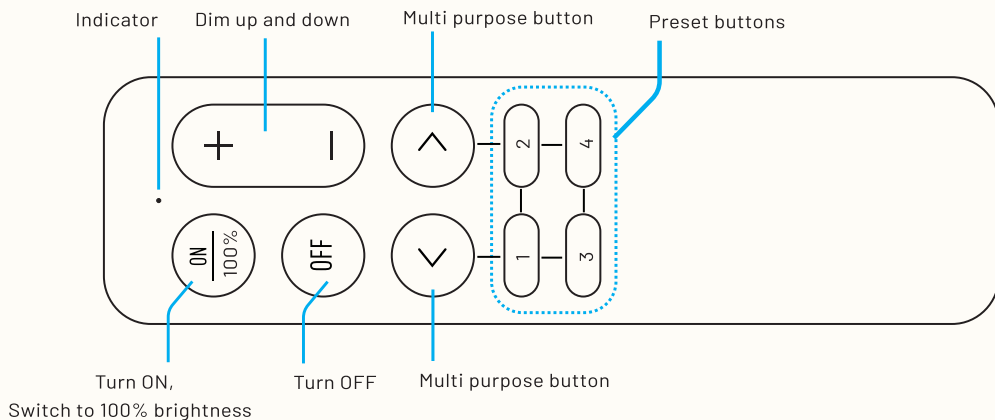

# CASAMBI

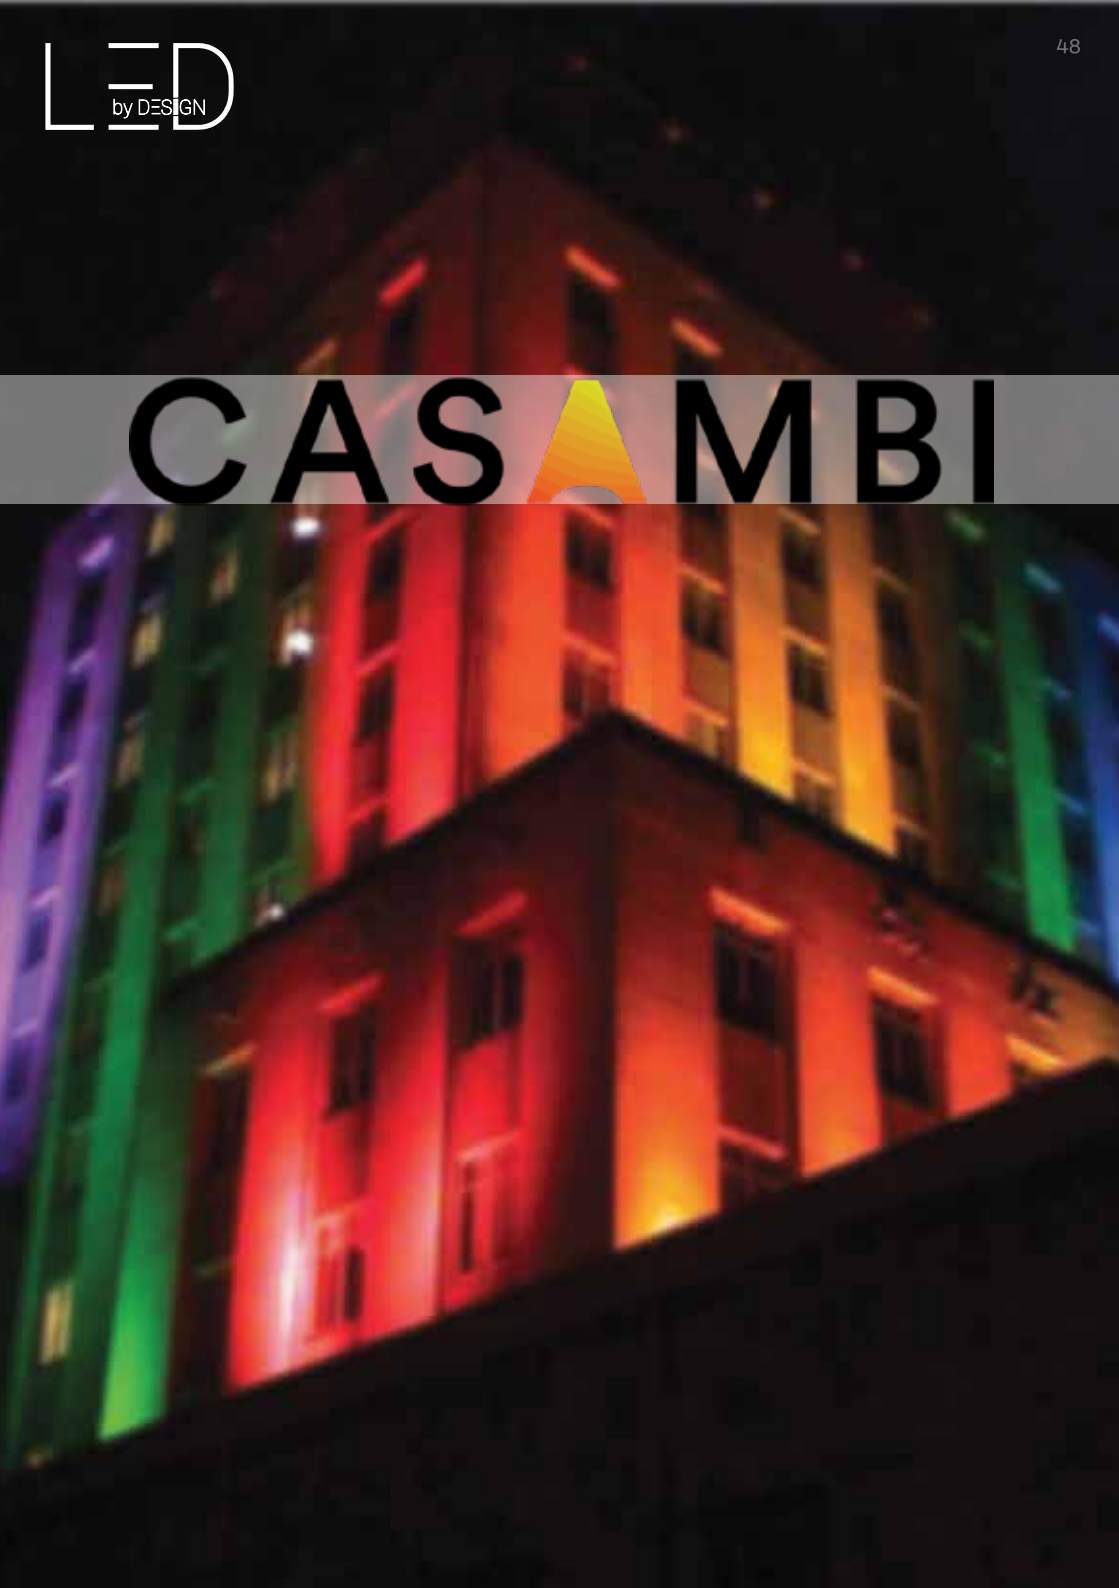

# CASAMBI TO DMX

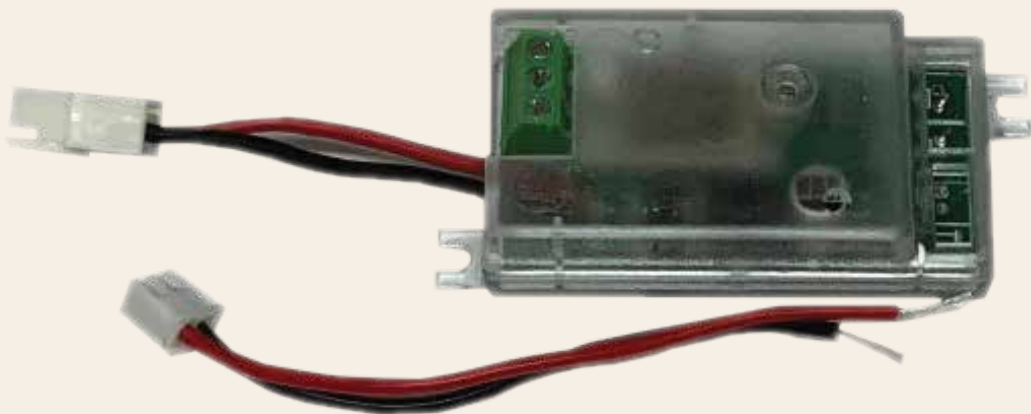

# DIMX

## Description



DiMX is Casambi enabled wireless controller of up to 8 channels DMX-512 dimmer.

DiMX enables the connection of DMX-512 Master controller to Casambi network. DiMX can be also used to be connected directly to DMX controlled fixtures and devices such as Lumemetix CMT and ALM, each device will be controlled individually through the Casambi App. DiMX supports: RGB/RGBW/Tuneable White/ HSL.

## Technical Information

Input	
Power	included 12-36VDC 35mA
Output	
DMX 512 signal	D+/D-/Ground
Wire Type	14-22AWG
Operating Temp	-20...+45°C
Radio Transceiver	2.401-2.483Ghz
Size (mm)	61x29x13
Size (in)	2.4x1.14x0.5
Weight	20gr
Control Device	iOS device - iPod/iPhone/iPad Android 4.4 or later devices.
Protocols	RGB/W & HSL
Installation	Remote or integrated
Certificates	CE, UL Approved

# DiMX - Casambi enabled DMX controller

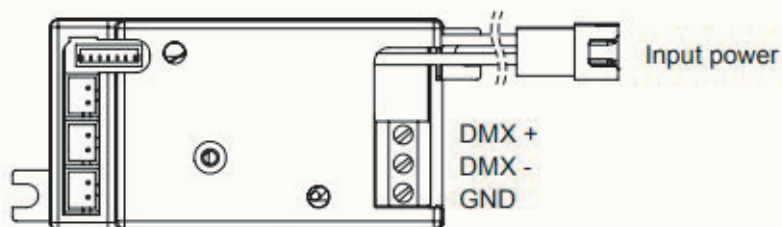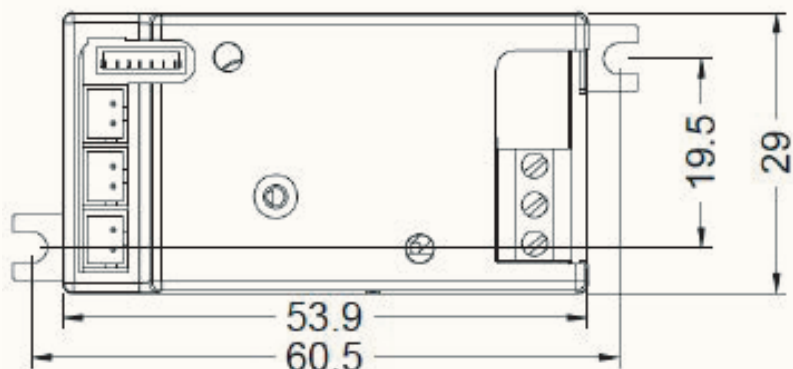

All dimensions are in "mm"

CASAMBI





“Celebrate life with **colour** options”

# LED E27 BULBS

## E27 Smart White

E27 Smart White is a Wireless Casambi Controller E27 Tuneable White LED Bulb. The new LED lamp brings innovative functions into any conventional light with the most common standard E27 screw socket, E27 Smart White delivering high colour rendering index of 90 Ra. E27 Smart White is completely retrofit. Just screw in the bulb and use it, easy installation and no electrical adjustments.



## E27 RGBTW LED Bulb

E27 Smart RGB+TW is a Wireless Casambi Controller E27 Tuneable White LED with RGB Bulb. The new LED lamp brings innovative functions into any conventional light with the most common standard E27 screw socket, E27 Smart RGB+TW delivering high colour rendering index of 90 Ra. E27 Smart RGB+TW is completely retrofit. Just screw in the bulb and use it, easy installation and no electrical adjustments.

## T38 E27 Smart LED Bulb

T38 High Output is a Wireless Casambi Controller E27 LED Bulb. The new LED lamp brings innovative functions into any conventional light with the most common standard E27 screw socket, T38 High Output is completely retrofit. Just screw in the bulb and use it, easy installation and no electrical adjustments.





# E27 Smart White

## Technical Information

Light Source	LED	Lumen	640lm	IP	50
CRI	>90	Input Voltage	100-240VAC 50/60Hz	Diameter	60mm
CCT Rage	2200-6500K	Cap Type	E27	Heigh	107mm
Flicker Free	Yes	Average Life Time	25000 hours		
Power	8w	Control	Wireless by Casambi App		



# E27 RGBTW LED Bulb

## Technical Information

Light Source	LED	Lumen	640lm	IP	50
CRI	>90	Input Voltage	100-240VAC 50/60Hz	Diameter	60mm
CW CCT Rage	2200-6500K & RGB	Cap Type	E27	Heigh	107mm
Flicker Free	Yes	Average Life Time	25000 hours		
Power	8w	Control	Wireless by Casambi App		

# T38 E27 Smart LED Bulb

## Technical Information

Light Source	LED	Lumen	460lm	IP	50
CRI	>90	Input Voltage	100-240VAC 50/60Hz	Diameter	38mm
CW CCT Rage	2700K / 3000K / 4000K	Cap Type	E27	Heigh	133mm
Flicker Free	Yes	Average Life Time	25000 hours		
Power	5.6w	Control	Wireless by Casambi App		

# CASAMBI



# **SMART**

# **LED**

# FILAMENT


# Bulbs



CASAMBI  
**CONTROLLED**  
FILAMENT  
Bulbs

# Description

Our collection of decorative LED filament bulb is the fusion of the classic design of conventional incandescent bulbs with energy efficiency, durability, and Casambi Technology that enables you to control the dimming option wirelessly with a small touch of your phone. We offer a wide ranges of shapes and designs including Tabular, Globe, Pear/Squirrel, Candle & Golf ball, which are transforming the way we think about lighting.

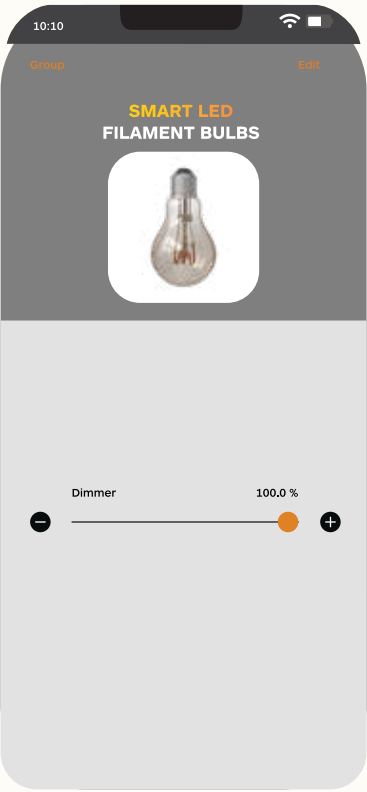

### Technical Information

Socket	E27
Filaments	Spiral
Dimmable	By Casambi App
Power	4W
Equivalent	20W
CCT	2200K
CRI	90
Glass Finish	Amber
Warrant	3 Years
IP	20
Custom Range	50m
Lifetime	30000hrs
Cycles on/off	100000
Beam Angle	360°
Ceritificates	CE



A60



A110



G125



EGG



B35



BT165



ST64



T30







# PENDANT

## Sets



# Description

A trendy and elegant E27 lamp holder with a ceiling canopy & 1000mm long cable in a brass finish is ideal for elegant settings.



A trendy and elegant E27 lamp holder with a ceiling canopy & 1000mm long cable in a brass finish is ideal for elegant settings.

- Base: Edison Screw E27
- High: 70mmH x 40mmD
- Wattage: 240W
- End cap hole: 10 mm Comes with a matching metal cord grip
- Material: Iron
- Colour: Brass

## BRASS

A trendy and elegant E27 lamp holder with ceiling canopy & 1000mm long cable in a charcoal finish is ideal for elegant settings.



## CHARCOAL

- Base: Edison Screw E27
- High: 70mmH x 40mmD
- Wattage: 240W
- End cap hole: 10 mm Comes with a matching metal cord grip
- Material: Iron
- Colour: Charcoal



A trendy and elegant E27 lamp holder with a ceiling canopy with 1000mm long cable in a silver finish is ideal for elegant settings.

- Base: Edison Screw E27
- High: 70mmH x 40mmD
- Wattage: 240W
- End cap hole: 10 mm Comes with a matching metal cord grip
- Material: Iron
- Colour: Silver

## SILVER

A trendy and elegant E27 lamp holder with ceiling canopy & 1000mm long cable in a copper finish is ideal for elegant settings.



## COPPER

- Base: Edison Screw E27
- High: 70mmH x 40mmD
- Wattage: 240W
- End cap hole: 10 mm Comes with a matching metal cord grip
- Material: Iron
- Colour: Copper



**Company Registered Office :**

Suite No. A2, 16th Floor,  
One Capital Place,  
18 Luard Road,  
Wan Chai, Hong Kong



[sales@ledbydesign.asia](mailto:sales@ledbydesign.asia)



+852 95797372



<https://www.ledbydesign.asia>

**Click link & follow us on:**



@ledbydesign



led-by-design/