


Item name	QDim - Casambi 4CH 0-10V Controller
Ordering code	QDim
Item code	4CH-CAS-010
Date	

## QDim - Casambi enabled 4ch 0-10V controller

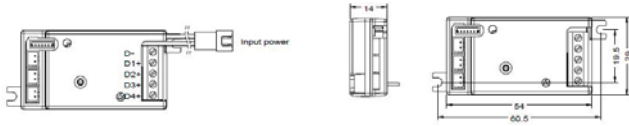

### Description

QDim is Casambi enabled wireless controller of up to 4 channels 0-10V dimmer.

QDim is controlled through the Casambi App using smartphone or tablet. QDim output can be connected to CC or CV 0-10V dimmable driver(s). Makes it possible to implement multi channel lighting system with adjustable colors RGB/RGBW or tune-able colors while reducing the wiring and components to minimum.

### App

QDim can be controlled and configured by Casambi free App. Multiple QDim devices can be used in the same area/network.

### Installation

QDim can be installed remotely or integrated in a fixture. QDim works with 12-36VDC class 2 power supply unit.

### Technical Information

Input:	
Power	12-36VDC 35mA
Output	0-10 4ch
Wire Type	14-22AWG
Operating Temp	-20...+45°C
Radio Transceiver	2.401-2.483Ghz

Size (mm)	61x29x14
Size (in)	2.4x1.14x0.5
Weight	20gr

Control Device	iOS device - iPod/iPhone/iPad Android 4.4 or later devices.
----------------	--

Control	1-4Ch/TW/RGB/RGBW
Installation	Remote or integrated
Certificates	CE, UL Pending



### NOTES:

We reserve the right to change specifications without prior notification.