


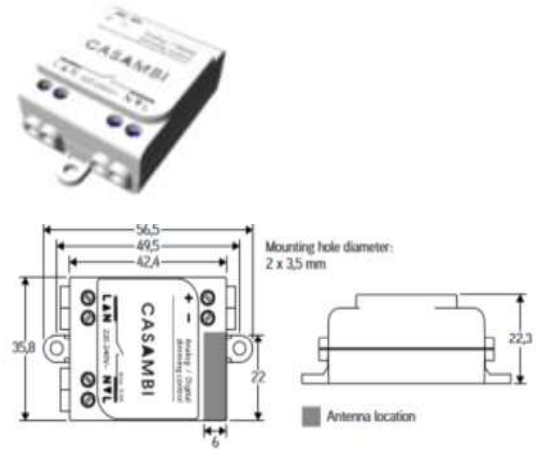
### General description

CBU-ASD is a wireless control unit for LED and halogen drivers with DALI dimming interface.

### Technical specifications

Housing	PC
Dimensions	56.5 x 35.8 x 22.3 mm
Weight	48g
Input voltage	220-240VAC 50Hz
DALI Output	9-12 VDC, max 1 driver connected
Radio transceiver	2.4...2.483 Ghz, +4 dBm
Operating temp. ambient	-20...+50°C (Iout 0 A) -20...+40°C (Iout 0.6 A)
Max. case temperature, tc:	+70 °C
Storage temp.	-25...+75 °C
Connectors	Wire range, solid & stranded 0.75-1.5 mm <sup>2</sup> 14-22 AWG
Wire strip length:	6-7 mm
Degree of protection:	IP20 (indoor use only)
Standards	

### Dimensions



### Features

- Wirelessly controllable
- No need for an external gateway device
- Forms automatically a fast wireless mesh network
- Very small form factor for luminaire installation
- Configurable analog/digital output
- Digital output: Standalone DALI

### Wiring diagrams

Wiring diagram, directly powered DALI or 0-10V drivers  
Suitable for drivers that can be switched off via control interface

