


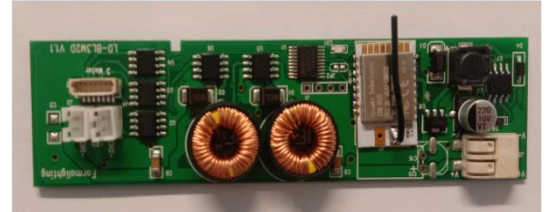
General description

2 channel wireless controlled Wisilica enabled constant current bluetooth dimmer. Can be controlled and monitored via mobile device or cloud platform.

Technical specifications

Dimensions	28 x 105 x 8 mm
Input voltage	48V DC
Output voltage	8-44V DC
Output current	Available from 200mA to 900mA for single channel mode, and up to 450 for dual channel mode.
Max. output power	40W
Dimming method	0-10V
Efficiency	90% Typical
Radio transceiver	2.4...2.483 Ghz, +4 dBm
Operating temp. ambient	-40...+85°C
Degree of protection:	IP20 (indoor use only)
Standards	CE 

Dimensions



Features

- 2 individually addressable 0-10 outputs for tunable white or single color
- Input voltage 48V DC
- Flicker-free dimming of LED luminaires

