


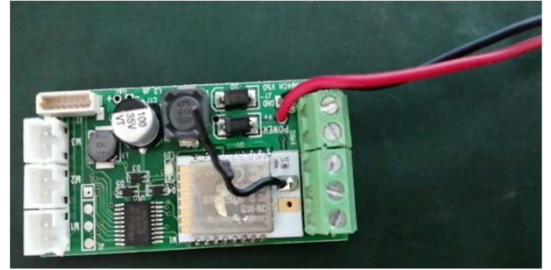
### General description

LD-BL24-3M4CH is a 4 channel wireless control unit for LED drivers with 0-10V dimming interface. Can be controlled and monitored via mobile device or cloud platform.

### Technical specifications

Dimensions	25 x 50 x 12 mm
Input voltage	Max. 40V DC
Dimming method	0-10V
Efficiency	90% Typical
Radio transceiver	2.4...2.483 Ghz, +4 dBm
Operating temp. ambient	-40...+85°C
Degree of protection:	IP20 (indoor use only)
Standards	CE 

### Dimensions



### Features

4 individually addressable 0-10 outputs for RGBA, RGB, tunable white or single color control.

Flicker-free dimming of LED luminaires

