

General description

LD-BL3M-4CHDMX is a DMX wireless controlled Casambi enabled bluetooth dimmer. Can be controlled and monitored via mobile device or cloud platform.


Technical specifications

Dimensions	25 x 50 x 12 mm
Input voltage	Max. 40V DC
Dimming method	DMX
Efficiency	90% Typical
Radio transceiver	2.4...2.483 Ghz, +4 dBm
Operating temp. ambient	-40...+85°C
Degree of protection:	IP20 (indoor use only)

Standards



Dimensions

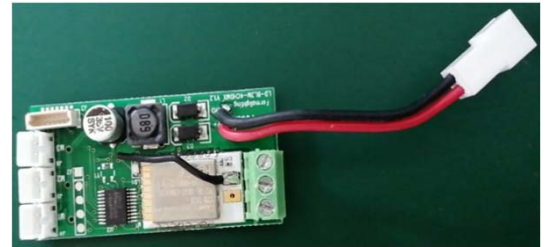

Features

- DMX output up to 8 channels.
- Flicker-free dimming of LED luminaires
- Possibility for HSL / RGB / HSLW / RGBW output.

